


GA700 Inverter 400 Volt Series Specifications

GA700 Part Number Breakdown

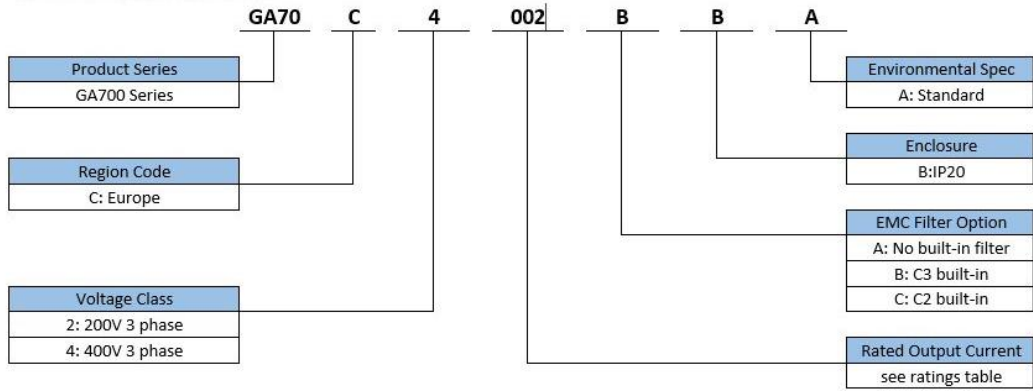

Supply Voltage 380 to 460 volt AC (for 480 volt supply see other sheet)

Catalogue Code GA70C	Motor Power HD/ND (kW)	Rated Output Current HD/ND (Amp)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
4002	0.55 / 0.75	1.8 / 2.1	260	140	176	3.5
4004	0.75 / 1.1	3.4 / 4.1	260	140	176	3.5
4005	1.5 / 2.2	4.8 / 5.4	260	140	176	3.5
4007	2.2 / 3.0	5.5 / 7.1	260	140	211/div>	3.9
4009	3.0 / 4.0	7.2 / 8.9	260	140	211	3.9
4012	3.7 / 5.5	9.2 / 11.9	260	140	211	3.9
4018	5.5 / 7.5	14.8 / 17.5	260	140	211	4.2
4023	7.5 / 11	18 / 23.4	260	140	211	4.2
4031	11 / 15	24 / 31	300	180	202	6.0
4038	15 / 18.5	31 / 38	300	180	202	6.0
4044	18.5 / 22	39 / 44	350	220	227	7.5
4060	22 / 30	45 / 59.6	350	220	246	13
4075	30 / 37	60 / 74.9	400	240	280	16
4089	37 / 45	75 / 89.2	450	255	280	35
4103	45 / 55	91 / 103	450	255	280	35
4140	55 / 75	112 / 140	543	264	335	40
4168	75 / 90	150 / 168	543	264	335	40
4208	90 / 110	180 / 208	700	312	420	80
4250	110 / 132	216 / 250	700	312	420	80
4296	132 / 160	260 / 296	700	312	420	80
4371	160 / 200	304 / 371	800	440	472	120
4389	200 / 220	371 / 389	800	440	472	120
4453	220 / 250	414 / 453	1140	510	480	175
4568	250 / 315	453 / 568	1140	510	480	175
4675	315 / 355	605 / 675	1140	510	480	175

Goodwin Electronics Limited. Tel +44(0)151 33 44 555, email: sales@goodwinelectronics.com

Website: www.goodwinelectronics.com

GA700 Inverter Rating and Dimensions 480v Supply.

Supply Voltage 461 to 480 volt AC (for 380 to 460 volt see other sheet)

Catalogue Code GA70C	Motor Power HD/ND (kW)	Rated Output Current HD/ND (Amp)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
4002	0.55 / 0.75	1.6 / 2.1	260	140	176	3.5
4004	0.75 / 1.5	2.1 / 3	260	140	176	3.5
4005	1.5 / 2.2	3.4 / 4.8	260	140	176	3.5
4007	2.2 / 3.0	4.8 / 6.9	260	140	211/div>	3.9
4009	3.0 / 4.0	6.9 / 7.6	260	140	211	3.9
4012	3.7 / 5.5	7.6 / 11	260	140	211	3.9
4018	5.5 / 7.5	11 / 14	260	140	211	4.2
4023	7.5 / 11	14 / 21	260	140	211	4.2
4031	11 / 15	21 / 27	300	180	202	6.0
4038	15 / 18.5	27 / 34	300	180	202	6.0
4044	18.5 / 22	34 / 40	350	220	227	7.5
4060	22 / 30	40 / 52	350	220	246	13
4075	30 / 37	52 / 65	400	240	280	16
4089	37 / 45	65 / 77	450	255	280	35
4103	45 / 55	77 / 96	450	255	280	35
4140	55 / 75	96 / 124	543	264	335	40
4168	75 / 90	124 / 156	543	264	335	40
4208	90 / 110	156 / 180	700	312	420	80
4250	110 / 150	180 / 240	700	312	420	80
4296	150 / 185	240 / 302	700	312	420	80
4371	185 / 220	302 / 361	800	440	472	120
4389	220 / 260	361 / 414	800	440	472	120
4453	260 / 300	414 / 477	1140	510	480	175
4568	300 / 335	477 / 515	1140	510	480	175
4675	370 / 450	590 / 720	1140	510	480	175